



CETO

PENDANT

Ceto captures the variation and rippling of the surface of the ocean. Each piece reflects a unique pattern, emitting a delicate luminosity, highlighting the presence of the sea. This sculptural luminaire is available in a selection of mouth-blown glass finishes combined with a highly refined machined aluminium body available in a black and champagne anodised finish. The Ceto Pendant Light softly illuminates a space, providing a tranquil calming light.

AVAILABLE FINISHES



TECHNICAL

MATERIAL	ANODISED ALUMINIUM, GLASS	IP RATING	IP20 - FOR INDOOR USE ONLY
LAMPING	SELV 60V - 4W LED MODULE, 300-380 LUMEN RANGE PER LIGHT SOURCE. 3000K WARM WHITE, DIMMABLE. EXTERNAL DRIVER INCLUDED. 120V / 230V - 4W AC LED MODULE, 380 LUMEN PER LIGHT SOURCE. 3000K WARM WHITE, DIMMABLE. ALL US AND CANADIAN ORDERS COME SUPPLIED WITH 120V COMPONENTRY CERTIFIED FOR USE IN THESE REGIONS. PLEASE CONTACT OUR STUDIO FOR FURTHER INFORMATION REGARDING MOST SUITABLE LAMPING TECHNOLOGY FOR YOUR SPECIFIC PROJECT.	CERTIFICATION	AS/NZS - 60598.2.1 EN - 60598.2.1 UL 1598, CSA C22.2#250.0
LED LIFESPAN	50,000 HRS	PRODUCT CODES SKU	EG. CP1-G-BLK.A-BLK = CETO PENDANT IN BLACK GLASS WITH A BLACK ANODISED BODY CP1-G-XXX.A-XXX CETO PENDANT- SINGLE CP3-G-XXX.A-XXX CETO PENDANT- TRIPLE CP7-G-XXX.A-XXX CETO PENDANT- SEVEN
CONTROL	SELV 60V LED MODULE - EXTERNAL DRIVER REQUIRED PHASE (TRAILING EDGE/LEADING EDGE) - DIMMING RANGE 5 - 100%. DIGITAL / SMART SYSTEMS (DALI) - DIMMING RANGE 5 - 100%. 1-10V - DIMMING RANGE 5 - 100%. 0-10V - NOT COMPATIBLE. 130V / 230V - 4W AC LED MODULE PHASE (TRAILING EDGE/LEADING EDGE) - DIMMING RANGE 5 - 100%. DIGITAL / SMART SYSTEMS (DALI/CBUS) - NON-DIMMABLE, ON/OFF FUNCTIONALITY ONLY VIA DALI SWITCH. 1-10V / 0-10V - NOT COMPATIBLE. **FOR OPTIMAL DIMMING PERFORMANCE WE RECOMMEND SOURCING A ROTARY OR PUSH BUTTON DIMMER WITH ADJUSTMENT DIAL CAPABLE OF SETTING THE DIMMING RANGE OF THE FIXTURE.	FINISHES FOR ALL VARIATIONS:	GLASS: FROSTED BLACK (G-FBK) BLACK (G-BLK) CLEAR (G-CLR) WHITE (G-WHT) BODY: BLACK ANODISED (A-BLK) CHAMPAGNE ANODISED (A-CHM)
CORD	2M / 6.6' SUPPLIED DOUBLE INSULATED CABLE COVERED BY A DURABLE BLACK OR WHITE CLOTH COVER. LONGER LENGTHS AVAILABLE UPON REQUEST.	DIMENSIONS	VARIOUS - SEE DIMENSIONS ON FOLLOWING PAGE*
CANOPY	BLACK (WITH BLACK ANODISED BODY) OR CHAMPAGNE (WITH CHAMPAGNE ANODISED BODY)	WEIGHT	CP1 - 1.5KG / 3LB CP3 - 4.5KG / 10LB CP7 - 10.5KG / 23LB
		PACKAGING	CP1 - L 25CM W 25CM H 15CM / L 9.8" W 9.8" H 5.9" CP3 - L 51CM W 51CM H 25CM / L 20" W 20" H 9.8" CP7 - L 51CM W 51CM H 51CM / L 20" W 20" H 20"
		PACKAGING WEIGHT	CP1 - 3KG / 6.5LB CP3 - 5.5KG / 12LB CP7 - 11.5KG / 25LB


DIMENSIONS



CP1
Ø 200MM H 105MM
Ø 7.9" H 4.1"



CP3
Ø 410MM H 120MM
Ø 16.1" H 4.7"

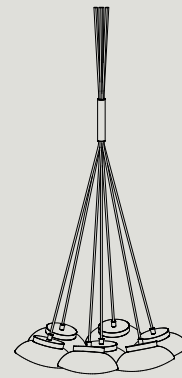

CP7
Ø 590MM H 130MM
Ø 23.2" H 5.1"